



Disassembling LG 440G Rear casing

Remove back casing.

Written By: Emily Class





TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Turn off phone.



- Power phone off by pressing and holding red button.

Step 2 — Flip phone.




- Flip over phone to expose the rear.

Step 3 — Rear cover removal.




- Slide rear cover downward and lift off. You can now access the battery.

Step 4 — Removal of battery.

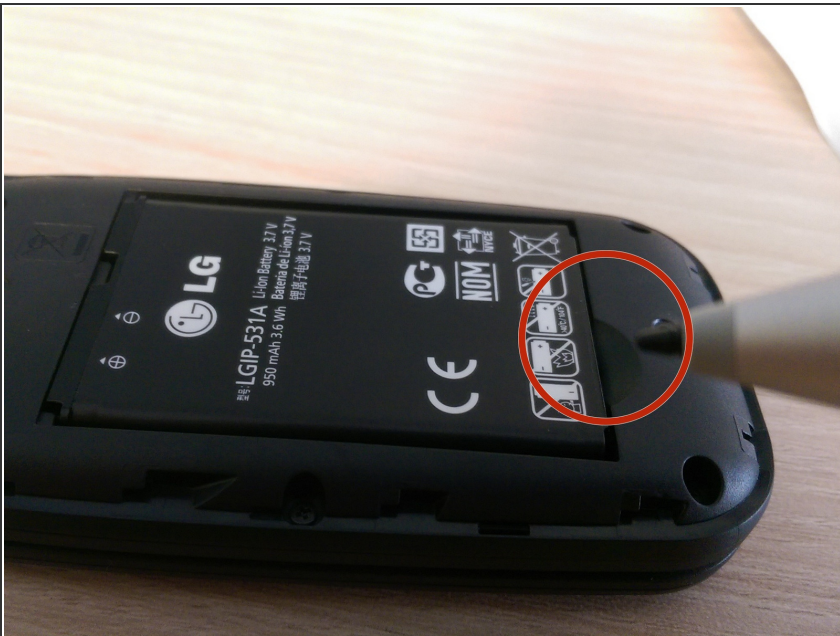


- Gently lift battery from bottom. Battery should lift out easily.

Step 5 — Unscrew six screws along edges of casing

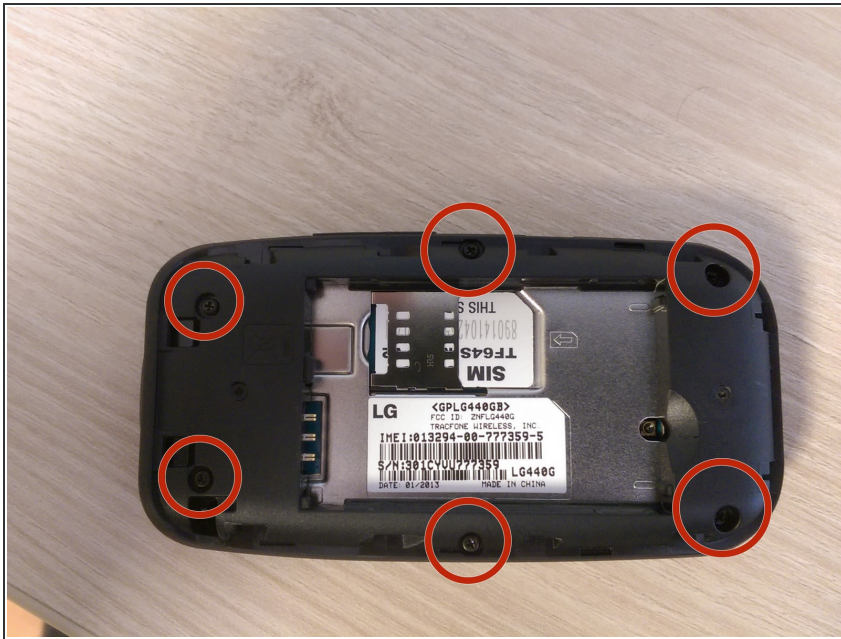

- Use PH00 screw driver bit to loosen and remove six screws
- ⓘ Save screws for reassembly.

Step 6 — Lift casing cover

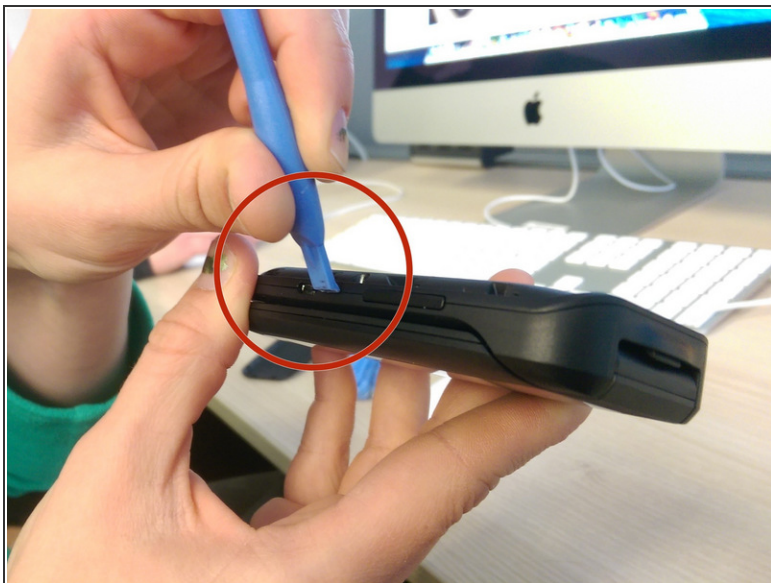

- Use plastic opening tool to release the casing cover.
- Run the tool along edge of phone.
- Lift casing cover.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-04 11:44:31 AM.